



LED LIGHT, CONTROLLER / TRANSFORMER

Picture 1: Coupling of accessories

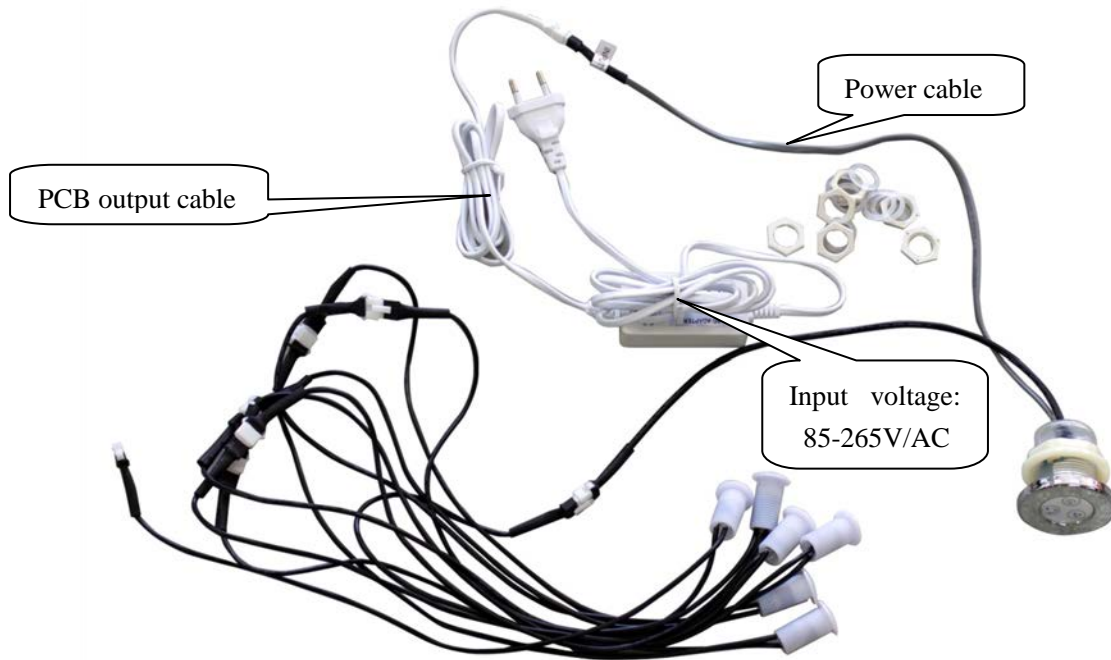

Picture 2: Layout of the control panel

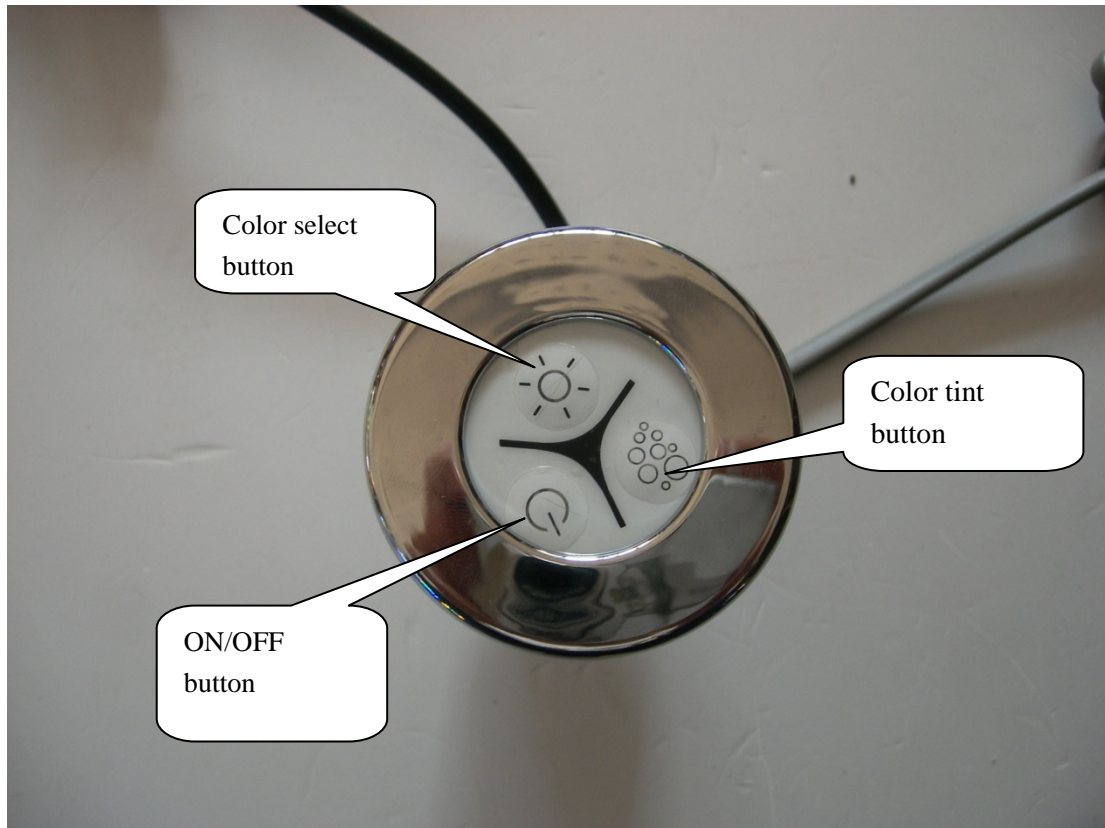

Usage of the light:

1. Connect all couplings and accessories as shown in picture 1, before connecting the equipment to the grid. First press the the "Color select button" or the "Color tint button" and then press the "ON/OFF button" to activate the control panel. **Don't press the "ON/OFF button" first.**
2. To shut down the light, after you've followed the instructions in step 1, press the "ON/OFF button" to turn the light off, press it again to turn it back on.
3. If you press the "Color select button" the light will change between colors in the following order: red, green, blue, red + green, red + blue, blue + green, red + green + blue.
4. If you have pressed the "Color tint button" the colors will automatically change with a 5 second delay.

NOTE: When you connect the light to the grid you have to follow step 1. After step 1 is done do not disconnect the light from the grid again, the control panel is now working normally and the "ON/OFF button" can be used to turn it on and off. **If the electricity is somehow lost then remember to follow step 1 again. Do not use the "ON/OFF" button then, use one of the other buttons.**

Warning! The control panel may not be mounted inside the bath or in a place where it will be regularly exposed to water.